


FFF Installations



Aquaculture Feeding Systems

For Land Based, Offshore and RAS Systems.

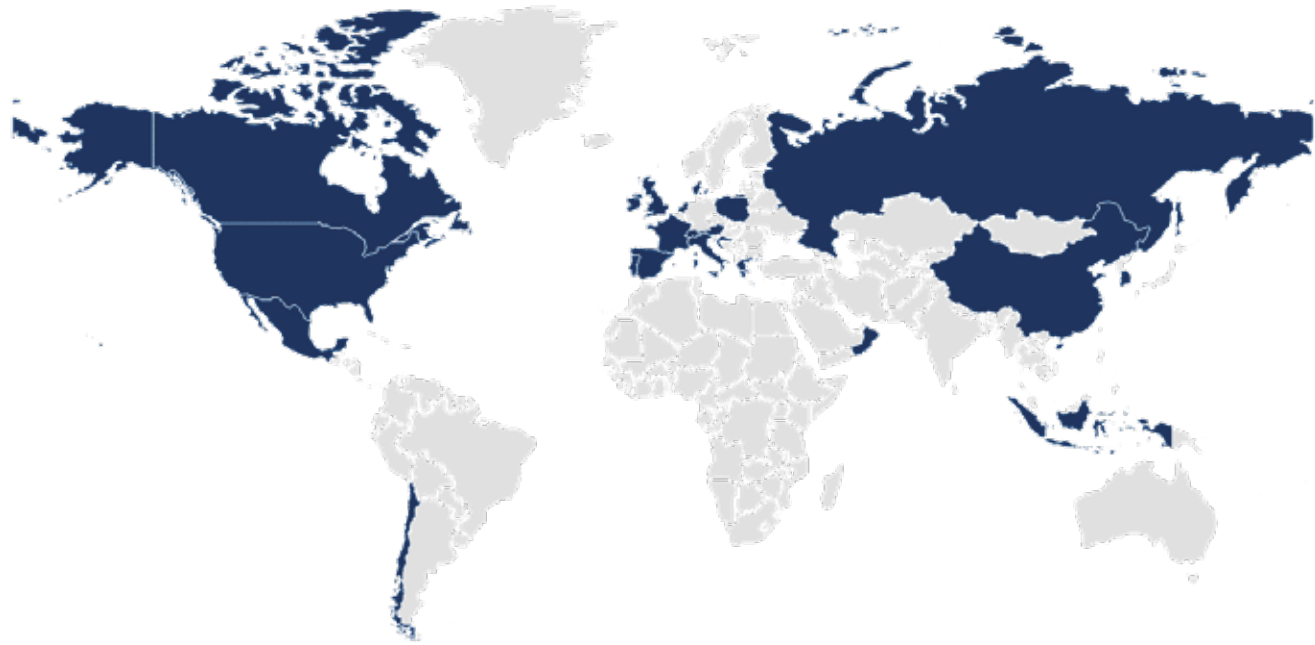

www.fishfarmfeeder.com



OFFICE: Ctra. Madrid, 152 • 36318 Vigo (Pontevedra) Spain • Tel. + 34 986 481 040 • Fax + 34 986 406 701 • info@fishfarmfeeder.com
FACTORY: Polígono Industrial PPI-7 • Nave 5 • 36475 Porriño (Pontevedra) Spain

IMMERSION VACCINATOR

Immersion Vaccinator

Work Parameters

- Up to 25 liters of vaccine.
- Configurable vaccination time.
- Configurable inlet water flow.

See more pics >



Standardization of the vaccination procedure

- Fry are smoothly “dewatered” automatically during a standard time before being admitted in the vaccination bath.
- The bath duration can be adapted by the operator.
- The volume of the bath chamber is up to 25 liters of vaccine.



Labour Savings

The FFF Vaccinator remains under the control of a single operator for the whole process when vaccination at hatcheries often requires a team of 5 or 6 people to reach the same vaccination rhythm.



Tough construction

The Vaccinator is built from carefully chosen material and equipment. It is seawater resistant and highly reliable.



Commissioning

Very easy and shall not require specific assistance. However, FFF is keen to support any new user if needed.

Easiness of use:

- FFF Bath Vaccinator is on wheels to move into the hatchery.
- It is then stabilized with four extension legs with height adjustment to tank wall height.
- It is meant for direct connection to a fish pump but can also be used when fed with scoop-nets using an additional loading funnel.