



# Screw Feeder

AUTOMATED FEEDING SYSTEMS FOR AQUACULTURE

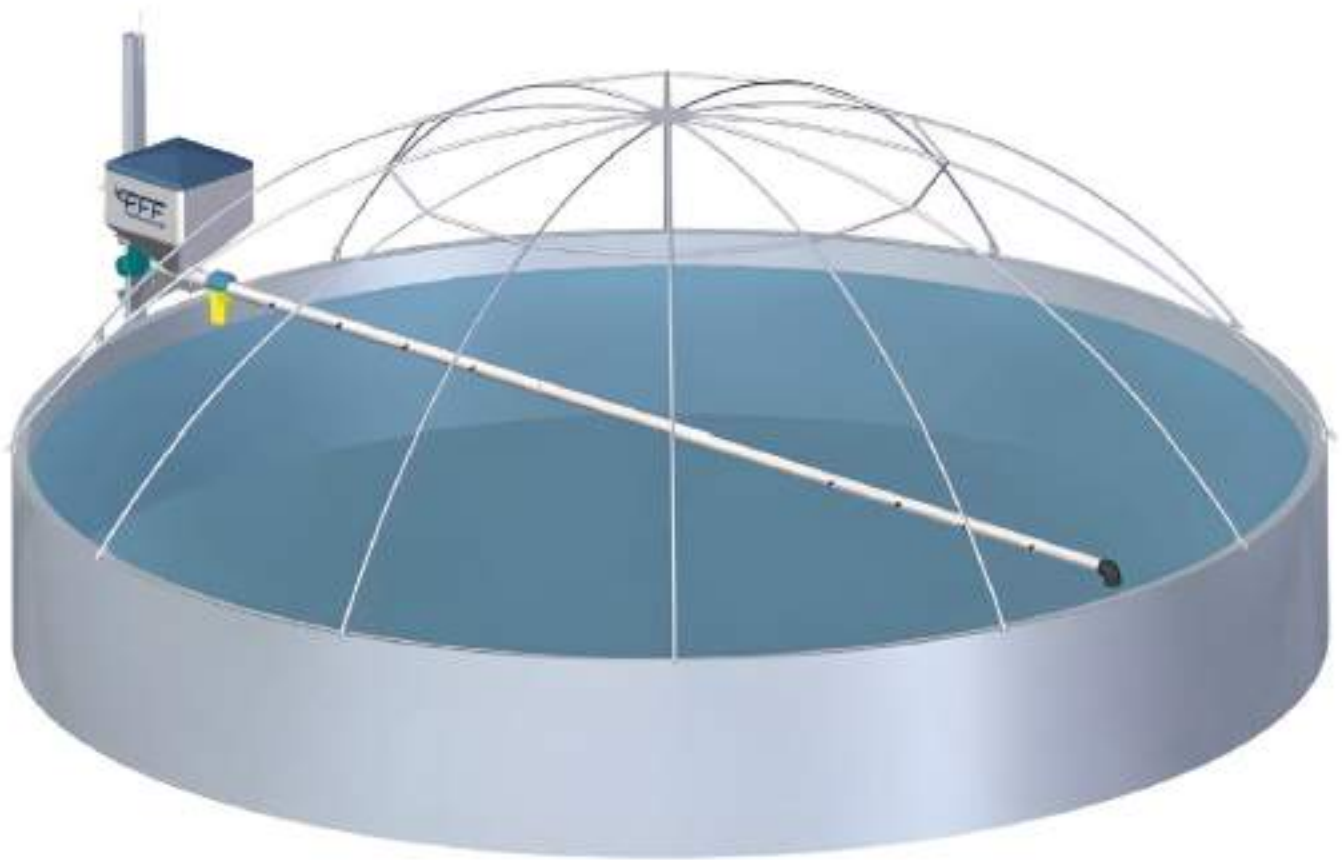


## Diametrical Feeder

Up to 15 meters

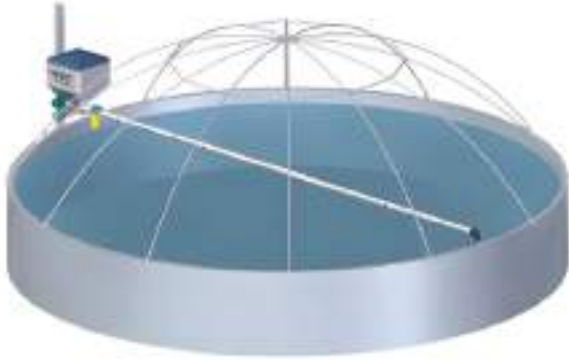

## Radial Feeder

Up to 4 meters

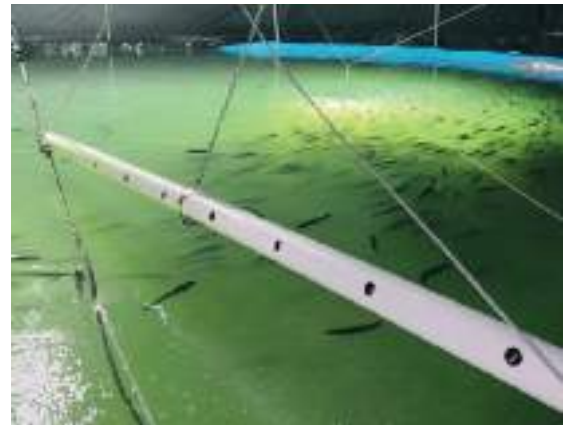


Feeder Diameter	Ø 50 mm	Ø 75 mm
Feeder Type	Diametral and Radial	
Pipe Length	from 3 to 15 m	
Hopper Options in SS	50, 100, 150, 200 and 250 l	
Plastic Hoppers Options	150 and 250 l	
Calibers	from 0.7 to 2 mm	from 1 to 9 mm

## Up&Down Feeder

It can be accommodated to the water mirror

Tube Length	1 m
Hopper Capacity	10 l
Calibers	from 0.7 to 2 mm
Calibration Rate	from 0.6 to 0.8 g/s
Installed Power (motor+control)	40 W + 100 W
Nominal Voltage	220 Vca, 50 Hz

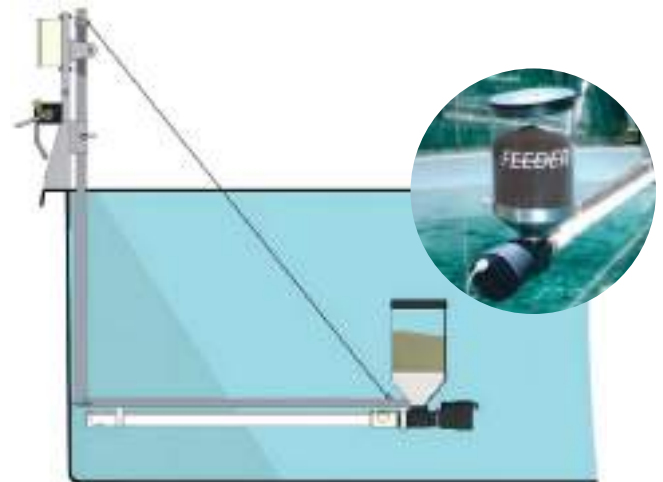

## Feeder TK



Software where each tank is an independent unit (Station) and is connected to a central unit (Manager).



It is very simple to scale the number of connected and controlled tanks. Easy to maintain and replace control stations in case of failure (Plug & Play), without requiring the assistance of technical service.



Feeder TK is compatible with already installed equipment, so it can replace previous versions.



## FEEDING SYSTEMS



Live feed

### HATCHERIES

Pellet 50-800  $\mu$   
 $\varnothing$  Pipe 20 mm



Dry feed



### PRE-GROW

Pellet 1-4 mm  
 $\varnothing$  Pipe 25-40 mm



### ONGROWING

Pellet 4-20 mm  
 $\varnothing$  Pipe 50-90 mm



## EQUIPMENT



Propeller Pumps



Spreaders



Immersion Vaccinator

